



PEDESTRIAN SECURITY GATES

SKU	DESCRIPTION	SINGLE	PAIR	SPAN
PI-41844-200-000	8' Entry Gate	\$1,350	\$2,295	8' span*
PI-42863-100-000	Gate Anchor	\$350	\$590	

Click on the [table links](#) to see specification drawings.

*Total span for gate pairs can be increased by adding space in the center.

Pricing does not include shipping, installation, or taxes. Please allow 12-16 weeks for delivery.

Payment Terms: 50% deposit due at time of order. Remaining 50% due prior to final shipment.

SHIPPING QUOTES

For a shipping quote please contact us with the size, quantity, destination zip code, and if a lift gate is required.


FEATURES

- **Heavy-Duty Steel Construction** – Fabricated from structural steel tubing and plate for long service life
- **Pedestrian Swing Gate Design** – Smooth operation (UHMW inside thrust washer), controlled swing for easy entry and exit
- **Multi-Position Locking** – 360° rotation, bi-directional locking at 90° and 180°, can be locked in the open position
- **High-Visibility Finish** – Industrial yellow powder coat improves visibility and safety awareness, prevents rust (standard color is safety yellow; special colors available for an additional fee)
- **Secure Locking Hardware** – Integrated pull pin with padlock capability
- **Grease Zerk** – Allows routine lubrication for smooth, reliable operation
- **Concrete-Mounted Base Plate** – Anchors securely to existing concrete surfaces, does not require a landing post
- **Add Signage** – With a flat plate for mounting

BENEFITS

- **Improves Pedestrian Safety** – Clearly defines controlled walkways and access points
- **Reduces Accident Risk** – Separates foot traffic from forklifts, vehicles, and equipment
- **Long-Term Durability** – Steel construction withstands harsh industrial environments
- **Low Maintenance** – Simple mechanical design with accessible lubrication points
- **Customizable** – Dimensions, signage, and finishes can be tailored to site requirements
- **Professional Appearance** – Clean fabrication and finish enhance facility presentation



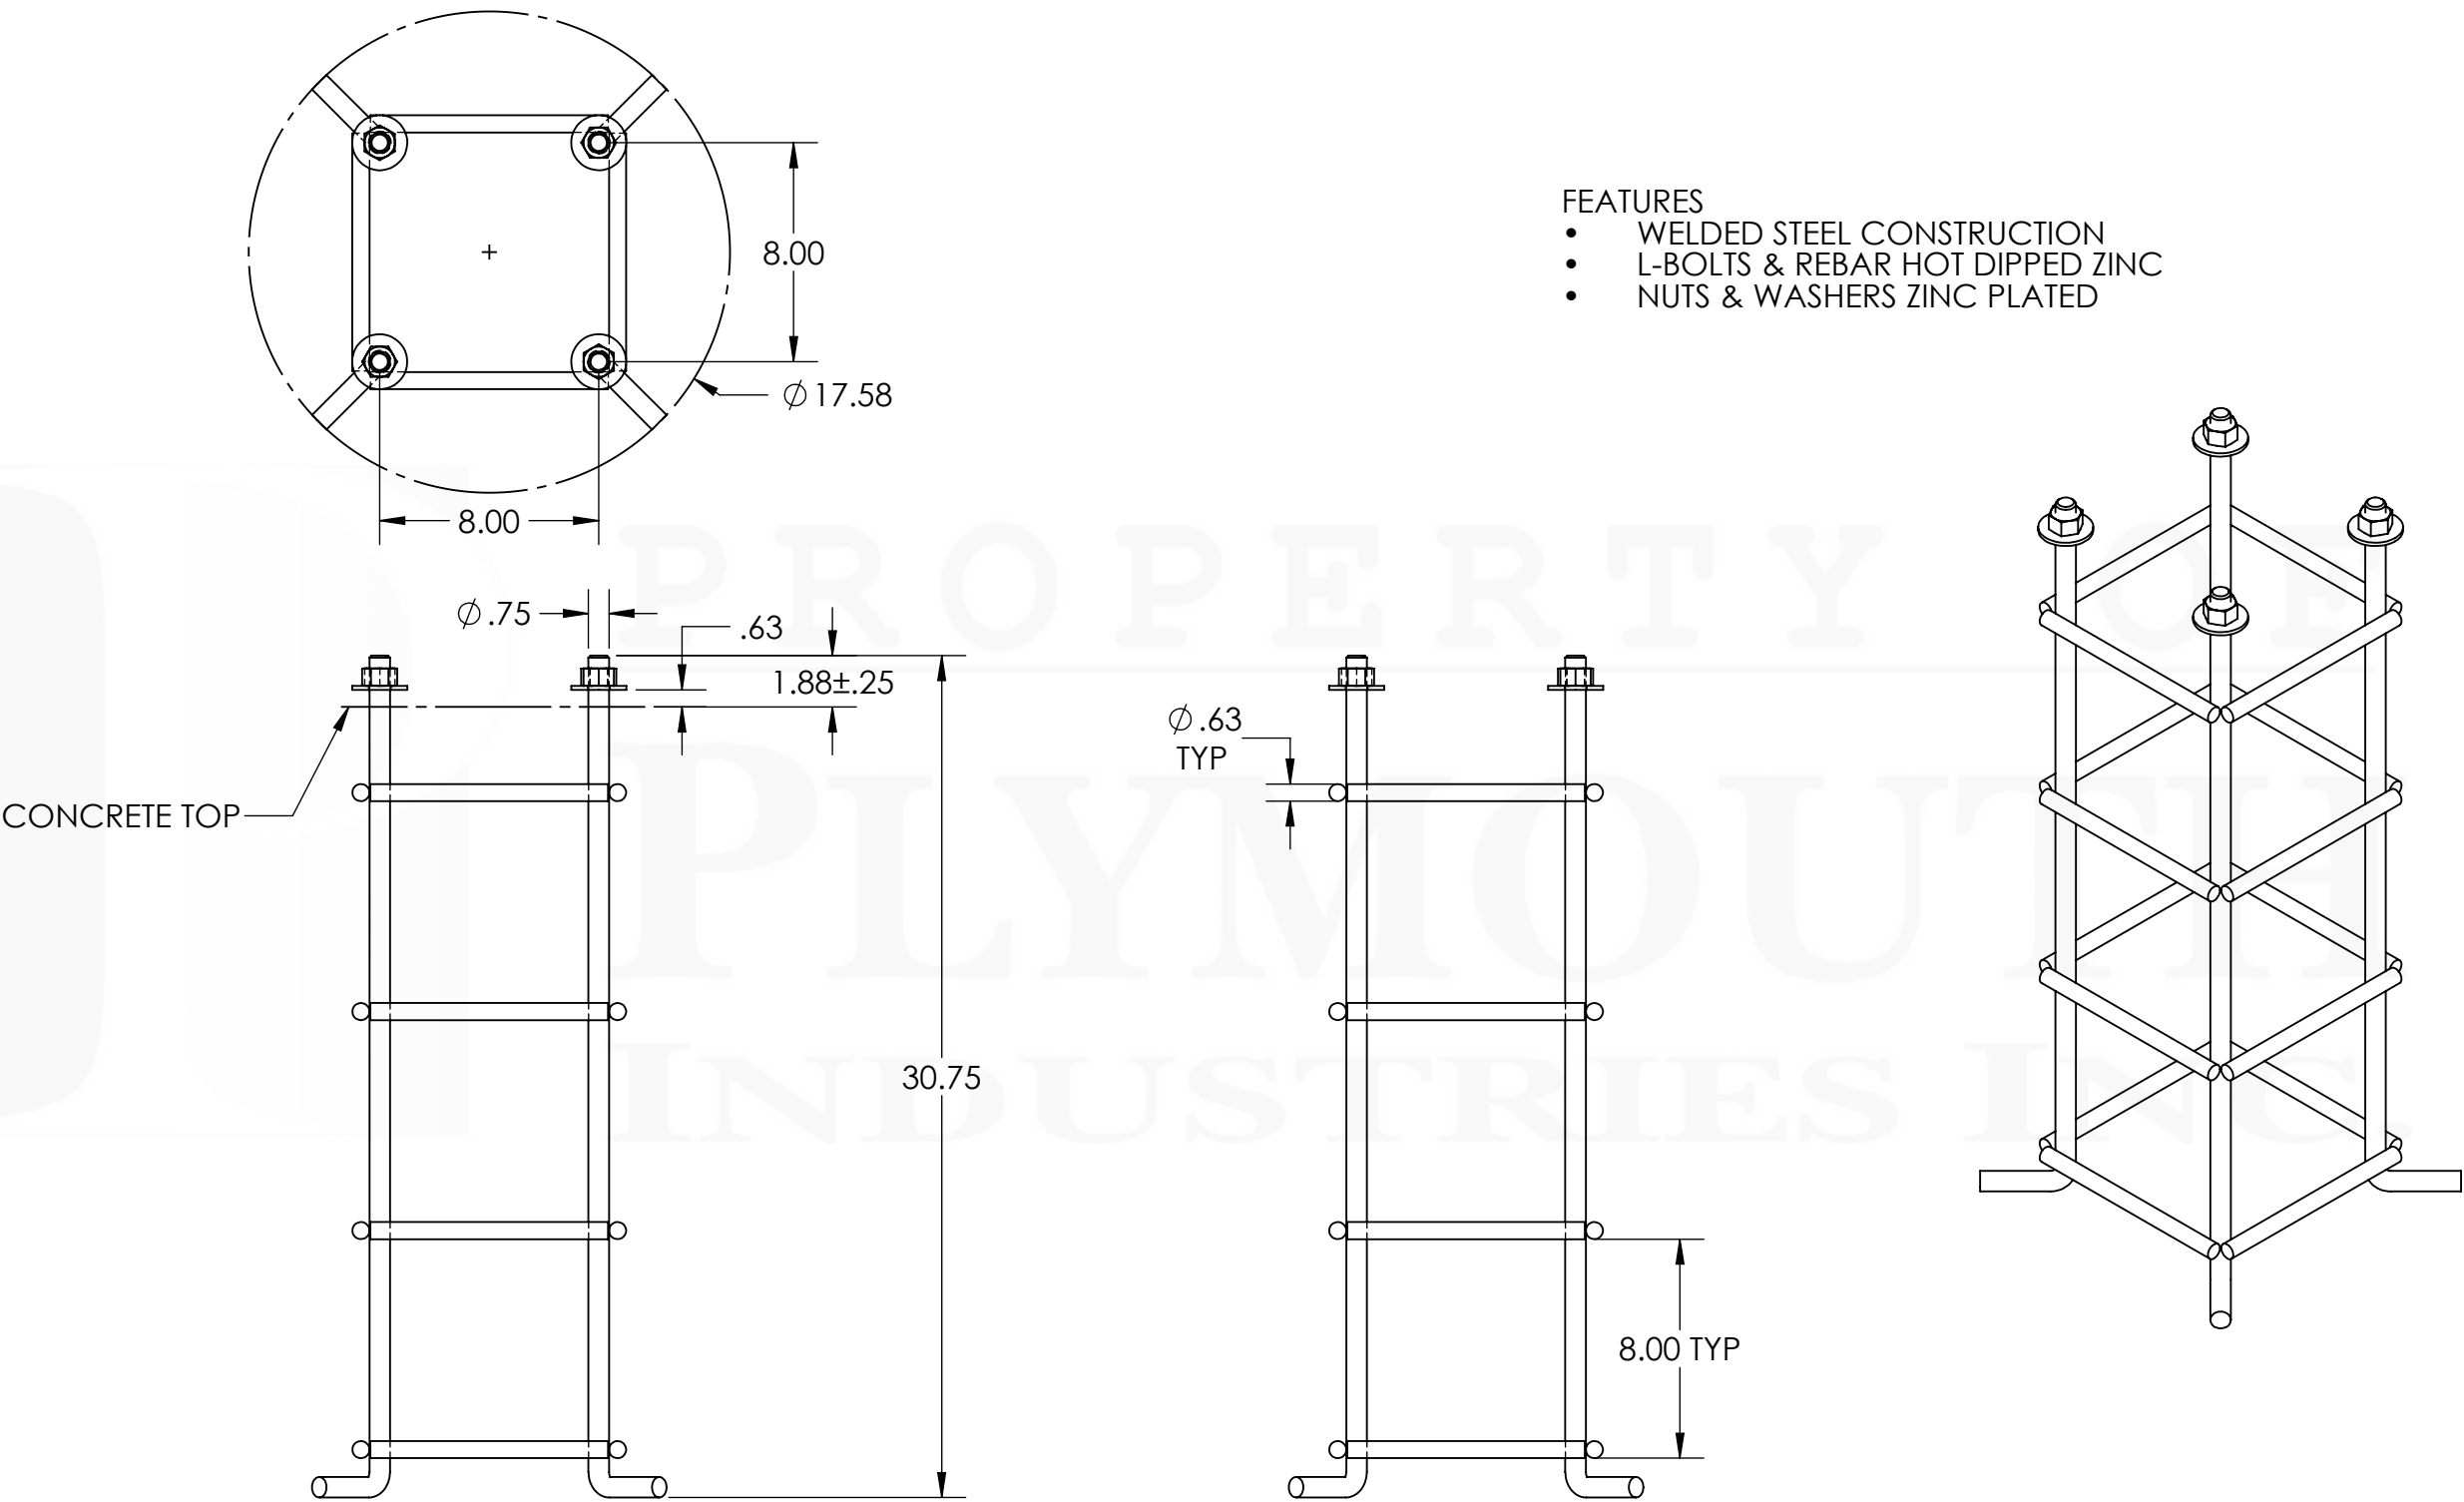



- FEATURES
- WELDED STEEL CONSTRUCTION
 - L-BOLTS & REBAR HOT DIPPED ZINC
 - NUTS & WASHERS ZINC PLATED

APPROVED: _____
APPROVED AS NOTED: _____
REVISE & RESUBMIT: _____
BY: _____
DATE: _____

PLYMOUTH INDUSTRIES INC.
BY: _____
DATE: _____

PROPRIETARY INFORMATION: THE IDEAS AND INFORMATION REPRESENTED ON THESE PRINTS ARE THE INTELLECTUAL PROPERTY OF PLYMOUTH INDUSTRIES INC. ANY REPRODUCTION OR USE OF THESE IS STRICTLY PROHIBITED WITHOUT THE WRITTEN CONSENT OF PLYMOUTH INDUSTRIES INC. OR A PROPER COMPENSATION AGREEMENT.

DRAWING SCALE 1:7	DATE DRAWN 2/14/2023	DESIGNER Bob B.	DETAILER Bob B.	PLYMOUTH INDUSTRIES, INC.					DO NOT SCALE	
ASSY, GATE ANCHOR										
THIS MATERIAL OR ANY PART THEREOF MUST NOT BE REPRODUCED IN ANY FORM WITHOUT WRITTEN PERMISSION FROM PLYMOUTH INDUSTRIES INC.		THIRD ANGLE PROJECTION GEOMETRIC TOLERANCING PER ANSI Y14.5M		TOLERANCES UNLESS OTHERWISE SPECIFIED	FRACT. ±1/32 0.XX ±0.015 0.XXX ±0.005 0.XXXX ±0.0005	ANGLES ±1° SURFACE FINISH 250  MAX	FABRICATION TOLERANCE +/- 1/16	SHEET 1 OF 1	S42863-100-000	REV -